


\$\$\$DGN\$SPECIFICATION\$\$\$\$\$\$  
 \$\$\$SYTIME\$\$\$\$\$\$  
 \$\$\$PRF\$\$\$  
 \$\$\$USERNAME\$\$\$


\$\$\$PRF\_ROT\$\$\$  
 \$\$\$PEN\$\$\$

\$\$\$FILE1\$\$\$  
 \$\$\$FILE2\$\$\$  
 \$\$\$FILE3\$\$\$

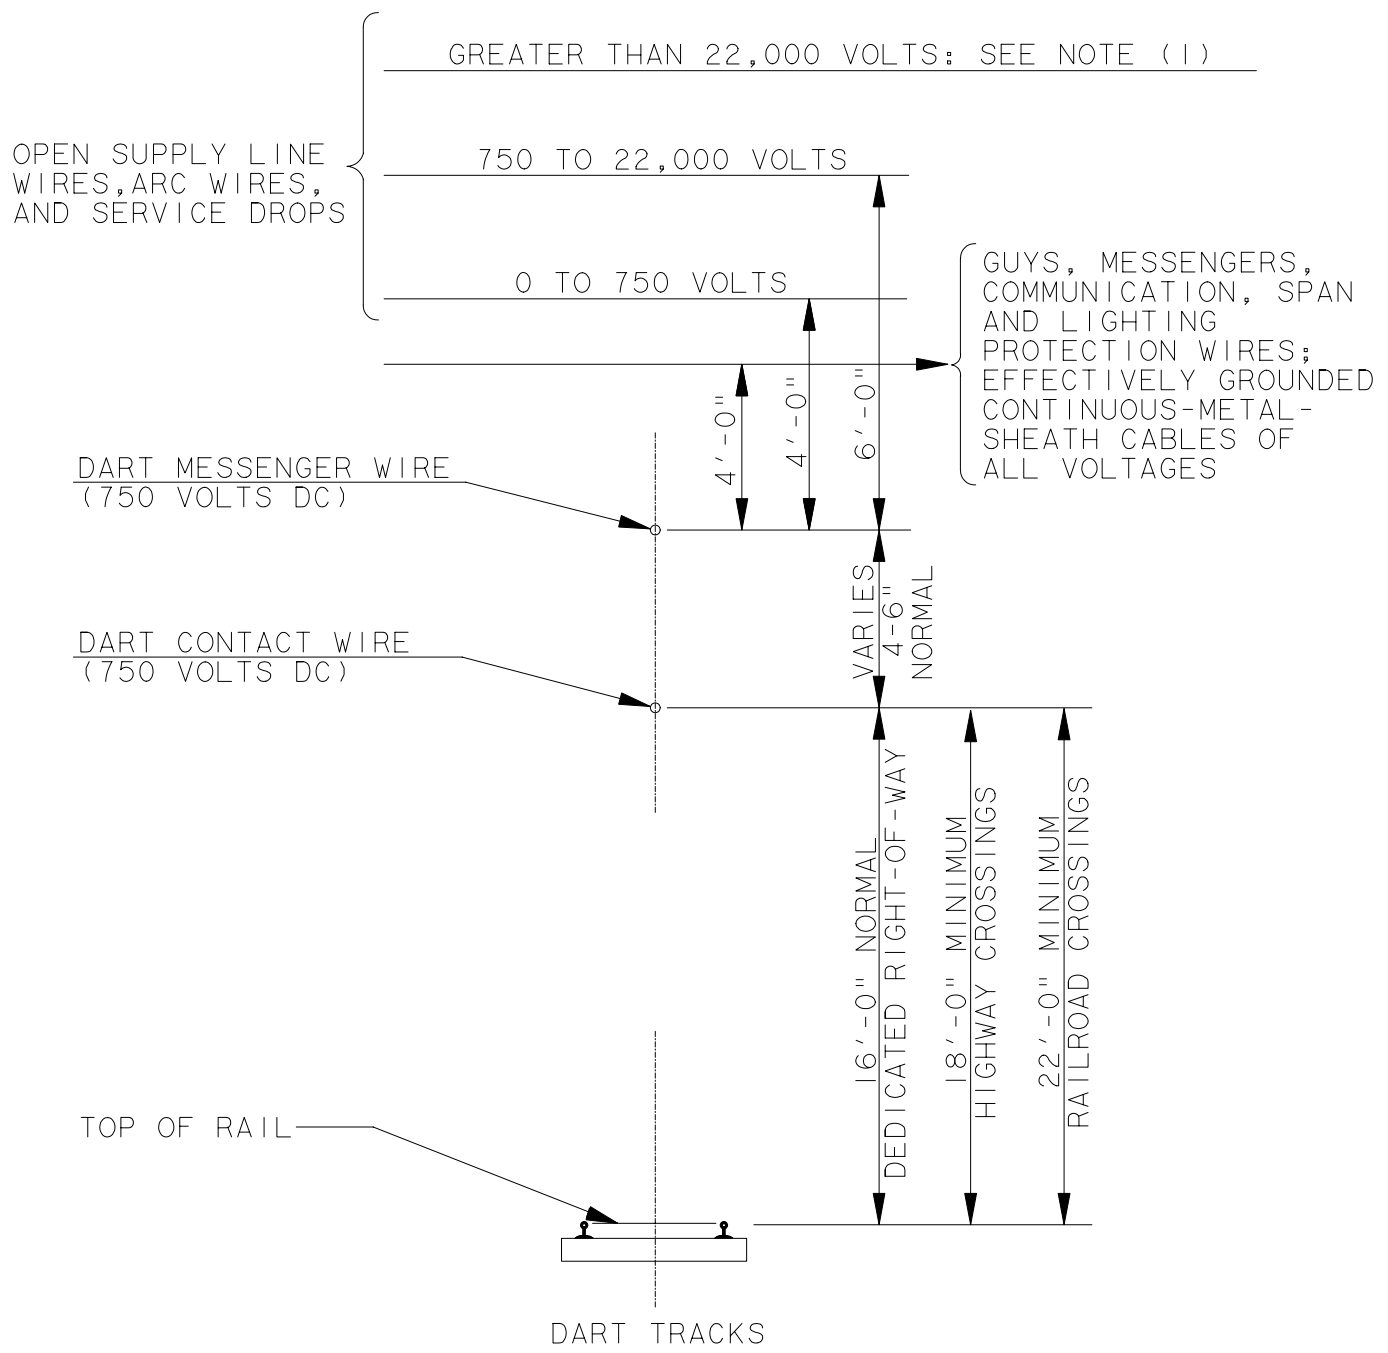

NOTE (1):

FOR VOLTAGES EXCEEDING 22,000 VOLTS, (UP TO 470,000 VOLTS), THE CLEARANCE SHALL BE INCREASED BY 0.4 INCH FOR EACH 1,000 VOLTS, OR FRACTION THEREOF, IN EXCESS OF 22,000 VOLTS. FOR VOLTAGES ABOVE 470,000, REFER TO NATIONAL ELECTRICAL SAFETY CODE.



DART DESIGN CRITERIA  
 VERTICAL CLEARANCES OF WIRES ABOVE DART TRACKS  
 SCALE: NTS  
 FIGURE: 6.3

\$\$\$DGN\$SPECIFICATION\$\$\$\$\$\$